Electrolux

SkyLine ProS Electric Combi Oven 10GN2/1

ЕМ #	
IODEL #	
AME #	
IS #	
IA #	



Main Features

- High resolution full touch screen interface (translated in more than 30 languages) - colorblind friendly panel.
- Boilerless steaming function to add and retain moisture for high quality, consistent cooking results.
- Dry hot convection cycle (max 300 °C) ideal for low humidity cooking. Automatic moistener (11 settings) for boiler-less steam generation.
- EcoDelta cooking: cooking with food probe difference maintaining preset temperature between the core of the food and the cooking
- Programs mode: a maximum of 1000 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. The recipes can be group in 16 different categories to better organize the menu. 16-step cooking programs also
- MultiTimer function to manage up to 20 different cooking cycles at the same time, improving flexibility and ensuring excellent cooking results. Can be saved up to 200 MultiTimer programs.
- OptiFlow air distribution system to achieve maximum performance in cooking eveness and temperature control thanks to a special design of the cooking chamber combined with high precision variable speed fan and venting valve.
- Fan with 7 speed levels from 300 to 1500 RPM and reverse rotation for optimal evenness. Fan stops in less than 5 seconds when door is opened.
- Single sensor core temperature probe included.
- Pictures upload for full customization of cooking
- Automatic fast cool down and pre-heat function.
- Reduced power function for customized slow
- SkyClean: Automatic and built-in self cleaning system. 5 automatic cycles (soft, medium, strong, extra strong, rinse-only) and green functions to save energy, water, detergent and rinse aid. Also programmable with delayed start.
- 3 different chemical options available: solid (phosphate-free), liquid (requires optional accessory), enzymatic.
- Plan-n-Save function organizes the cooking sequence of the chosen cycles optimizing the work in the kitchen from a time and energy efficiency
- Make-it-mine feature to allow full personalization or locking of the user interface.
- SkyHub lets the user group the favorite functions in the homepage for immediate access.
- MyPlanner works as an agenda where the user can plan the daily work and receive personalized alerts
- GreaseOut: predisposed for integrated grease drain and collection for safer operation (dedicated base as optional accessory).
- USB port to download HACCP data, share cooking programs and configurations. USB port also allows to plug-in sous-vide probe

(optional accessory).

• Connectivity ready for real time access to connected appliances from remote and HACCP monitoring (requires optional accessory).

Electrolux

- Trainings and guidances supporting materials easily accessible by scanning QR-Code with any mobile device.
- Back-up mode with self-diagnosis is automatically activated if a failure occurs to avoid downtime.
- Automatic consumption visualization at the end of the cycle.
- Capacity: 10 GN 2/1 or 20 GN 1/1 trays.
- Connectivity ready for real time access to connected appliances from remote and data monitoring (requires optional accessory contact the Company for more details).

Construction

- Human centered design with 4-star certification for ergonomics and usability.
- Wing-shaped handle with ergonomic design and hands-free opening with the elbow, making managing trays simpler (Registered Design at EPO).
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Front access to control board for easy service.
- IPX 5 spray water protection certification for easy cleaning.
- Supplied with n.1 tray rack 2/1 GN, 67 mm pitch.

Optional Accessories

- Water softener with cartridge and flow PNC 920003 meter (high steam usage)
- Water softener with salt for ovens with automatic regeneration of resin
- Resin sanitizer for water softener PNC 921306 (921305)
- Wheel kit for 6 & 10 GN 1/1 and 2/1 GN PNC 922003 oven base (not for the disassembled one)
- Pair of AISI 304 stainless steel grids, GN PNC 922017
 1/1
- Pair of grids for whole chicken (8 per grid 1,2kg each), GN 1/1
 PNC 922036
- AISI 304 stainless steel grid, GN 1/1
 PNC 922062
- AISI 304 stainless steel grid, GN 2/1
 PNC 922076
- External side spray unit (needs to be mounted outside and includes support to be mounted on the oven)
- Pair of AISI 304 stainless steel grids, GN PNC 922175 2/1
- Baking tray for 5 baguettes in perforated aluminum with silicon coating, 400x600x38mm
 PNC 922189
- Baking tray with 4 edges in perforated PNC 922190 aluminum, 400x600x20mm
- Baking tray with 4 edges in aluminum, PNC 922191 400x600x20mm

SkyLine ProS Electric Combi Oven 10GN2/1

Pair of frying basketsAISI 304 stainless steel bakery/pastry grid		922239 922264	
400x600mmDouble-step door opening kit		922265	
• Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1		922266	
 USB probe for sous-vide cooking Kit universal skewer rack and 6 short skewers for Lengthwise and Crosswise ovens 		922281 922325	
Universal skewer rack	PNC	922326	
6 short skewers	PNC	922328	
Water nanofilter for 10 GN 2/1 & 20 GN 1/1 & 2/1 ovens	PNC	922344	
• External reverse osmosis filter for ovens 10 GN 2/1 & 20 GN 1/1 & 2/1 ovens		922345	
Multipurpose hook		922348	
• 4 flanged feet for 6 & 10 GN , 2", 100-130mm			
• Grease collection tray, GN 2/1, H=60 mm		922357	
• Grid for whole duck (8 per grid - 1,8kg each), GN 1/1		922362	
Thermal cover for 10 GN 2/1 oven and blast chiller freezer			
Tray support for 6 & 10 GN 2/1 disassembled open base		922384	
Wall mounted detergent tank holder		922386	
 Tray rack with wheels 10 GN 2/1, 65mm pitch 	PNC	922603	
 Tray rack with wheels, 8 GN 2/1, 80mm pitch Slide-in rack with handle for 6 & 10 GN 2/1 oven 		922604 922605	
 Bakery/pastry tray rack with wheels 400x600mm for 10 GN 2/1 oven and blast chiller freezer, 80mm pitch (8 runners) 	PNC	922609	
• Open base with tray support for 6 & 10 GN 2/1 oven	PNC	922613	
• Cupboard base with tray support for 6 & 10 GN 2/1 oven	PNC	922616	
• External connection kit for liquid detergent and rinse aid	PNC	922618	
• Stacking kit for gas 6 GN 2/1 oven placed on gas 10 GN 2/1 oven	PNC	922621	
Trolley for slide-in rack for 10 GN 2/1 oven and blast chiller freezer	PNC	922627	
• Trolley for mobile rack for 6 GN 2/1 on 6 or 10 GN 2/1 ovens	PNC	922631	
• Stainless steel drain kit for 6 & 10 GN oven, dia=50mm	PNC	922636	
 Plastic drain kit for 6 &10 GN oven, dia=50mm 	PNC	922637	
 Trolley with 2 tanks for grease collection 		922638	
• Grease collection kit for open base (trolley with 2 tanks, open/close device and drain)		922639	
• Banquet rack with wheels holding 51 plates for 10 GN 2/1 oven and blast chiller freezer, 75mm pitch	PNC	922650	
 Dehydration tray, GN 1/1, H=20mm 	PNC	922651	
 Flat dehydration tray, GN 1/1 	PNC	922652	
Open base for 6 & 10 GN 2/1 oven, disassembled - NO accessory can be fitted	PNC	922654	
with the exception of 922384Heat shield for 10 GN 2/1 oven	PNC	922664	



SkyLine ProS Electric Combi Oven 10GN2/1

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.




	Heat shield-stacked for ovens 6 GN 2/1 on 10 GN 2/1	PNC 922667
•	Kit to fix oven to the wall	PNC 922687
•	Tray support for 6 & 10 GN 2/1 oven base	PNC 922692
•	4 adjustable feet with black cover for 6 & 10 GN ovens, 100-115mm	PNC 922693
•	Wifi board (NIU)	PNC 922695
•	Detergent tank holder for open base	PNC 922699
•	Mesh grilling grid, GN 1/1	PNC 922713
•	Probe holder for liquids	PNC 922714
•	Odourless hood with fan for 6 & 10 GN 2/1 electric ovens	PNC 922719
•	Odourless hood with fan for 6+6 or 6+10 GN 2/1 electric ovens	PNC 922721
•	Condensation hood with fan for 6 & 10 GN 2/1 electric oven	PNC 922724
•	Condensation hood with fan for stacking 6+6 or 6+10 GN 2/1 electric ovens	PNC 922726 🗅
•	Exhaust hood with fan for 6 & 10 GN 2/1 GN ovens	PNC 922729
•	Exhaust hood with fan for stacking 6+6 or 6+10 GN 2/1 ovens	PNC 922731
•	Exhaust hood without fan for 6&10x2/1 GN oven	PNC 922734
•	Exhaust hood without fan for stacking 6+6 or 6+10 GN 2/1 ovens	PNC 922736
•	4 high adjustable feet for 6 & 10 GN ovens, 230-290mm	PNC 922745
•	Tray for traditional static cooking, H=100mm	PNC 922746
•	Double-face griddle, one side ribbed and one side smooth, 400x600mm	PNC 922747
•	Trolley for grease collection kit	PNC 922752
•	Water inlet pressure reducer	PNC 922773
•	Kit for installation of electric power peak management system for 6 GN and 10 GN ovens	PNC 922774
•	Non-stick universal pan, GN 1/1, H=20mm	PNC 925000
•	Non-stick universal pan, GN 1/ 1, H=40mm	PNC 925001
•	Non-stick universal pan, GN 1/1, H=60mm	PNC 925002
•	Double-face griddle, one side ribbed and one side smooth, GN 1/1	PNC 925003
•	Aluminum grill, GN 1/1	PNC 925004
•	Frying pan for 8 eggs, pancakes, hamburgers, GN 1/1	PNC 925005
•	Flat baking tray with 2 edges, GN 1/1	PNC 925006
•	Potato baker for 28 potatoes, GN 1/1	PNC 925008
•	Compatibility kit for installation on previous base GN 2/1	PNC 930218 🗅



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Electrolux

SkyLine ProS Electric Combi Oven 10GN2/1

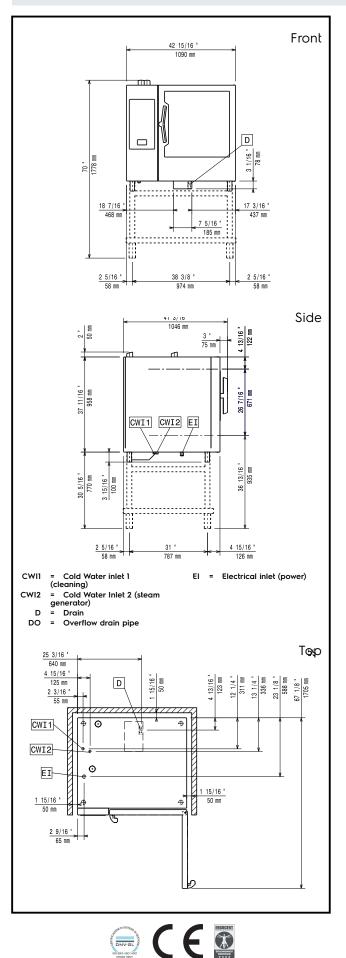

Electric

Supply voltage:

220-240 V/3 ph/50-60 Hz 380-415 V/3N ph/50-60 Hz 35.4 kW 37.9 kW

Water:

Water inlet connections "CWI1- CWI2":	3/4"			
Pressure, bar min/max:	1-4.5 bar			
Drain "D":	50mm			
Max inlet water supply				
temperature:	30 °C			
Hardness:	5 °fH / 2.8 °dH			
Chlorides:	<10 ppm			
Conductivity:	>285 µS/cm			
Electrolux recommends the use of treated water, based on testing of specific water conditions.				
Please refer to user manual for detailed water quality information.				
Installation:				

Clearance: Suggested clearance for service access:	Clearance: 5 cm rear and right hand sides. 50 cm left hand side.
Capacity:	
Trays type:	10 - 2/1 Gastronorm
Max load capacity:	100 kg
Key Information:	
Door hinges:	Right Side

1090 mm

hinges External dimensions, Width:

External dimensions, Height:	1058 mm
External dimensions, Depth:	971 mm
Weight:	167.5 kg
Net weight:	167.5 kg
Shipping weight:	195.5 kg
Shipping volume:	1.58 m³

SkyLine ProS Electric Combi Oven 10GN2/1

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.