



## The all-round performer



READY FOR DIGITAL SERVICES

### Colors

- Black/chrome
- Anthracite/chrome

### 1 A600 Options

- First shot
- Second bean grinder
- Bean hopper: 1×2 kg, 2×1.2 kg or 2×0.6 kg, lockable
- One or two separate powder dosing systems 0.6 kg or 1.2 kg (for chocolate or milk powder), lockable
- Coffee grounds chute assembly
- Cup sensor
- Raised feet (100 mm)
- Steam spout (S1), Autosteam (S2) (enhanced milk foaming) or Autosteam Pro (S3) (automatic milk foaming)
- Second milk type (only with the SU12)

### 2 Milk Systems

- FoamMaster™ (FM): hot and cold milk and milk foam, individually adjustable consistency, integrated cleaning system
- Milk system (MS): hot and cold milk and warm milk foam, exact dosing via milk pump

### 2 Cleaning Systems

- CleanMaster (CM): fully automatic cleaning system with integrated cleaning cartridge. For outstanding hygiene and unbeatable simplicity, efficiency, and convenience
- EasyClean (EC): automatic cleaning system with manual addition of the cleaning fluid. Perfect hygiene in just a few steps

### 3 Flavor Station

- Automatic dosing station for up to three flavors

### 4 Accounting System

- Can be used for various payment methods, e.g. with coins, card
- Ideally suited to public/private vending applications

### 5 Cup warmer

- With four heatable trays

### Flexibility

Our product portfolio allows various assembly options — tailored to your needs.



Franke Kaffeemaschinen AG  
cs-info.ch@franke.com

Franke Coffee Systems GmbH  
cs-info.de@franke.com

Franke Coffee Systems Americas  
cs-coffeesales.us@franke.com

Franke Coffee Systems UK  
sales@frankecoffeesystems.co.uk

coffee.franke.com



# A600




Expand your coffee business with the A600, our superior solution for served and self-service operations. Equipped with state-of-the-art yet easy-to-use technologies, the A600 is our versatile and intelligent all-rounder. This fully automatic coffee machine offers consistently high in-cup quality and gives you and your customers full control over the preparation of the finest coffee specialties - at the touch of a button.

Choose the A600 to bring unique coffee moments to large groups of guests with a wide choice of premium beverages.

CAPACITY*	SINGLE	PARALLEL
Espresso	150	194
Cappuccino	98	160
Coffee	100	121
Hot water	164	

\*Cups per hour according to DIN 18873

  
**CleanMaster**  
Fully automatic cleaning process meeting highest hygiene standards

  
**Touch Screen**  
Practical 8-inch touch screen for simple, easy operation

  
**FoamMaster™**  
For perfect foam, every time


590.0690.068/09.22/CH-EN/Subject to dimensional, design and version changes.



# Technical Data


## Machine Models

Model	Power
A600	220-240V 1LNPE 50/60Hz 2.4-2.8 kW (13/15/16*A)
A600 MS EC	220V 1LNPE 50 Hz 2.4 kW (16A)
A600 FM EC	200-240V 1LNPE 50/60 Hz 2.4-2.8 kW (13/15/16*A)
	380-415V 3LNPE 50/60 Hz 6.3-7.5 kW (16A)
	220-240V 1LNPE 50/60 Hz 4.4-5.0 kW (30A)
	220-240V 3LPE 50/60 Hz 5.6-7.9 kW (30A)
	200V 2LPE 50/60 Hz 2.0 kW (15A)
	200V 2LPE 50/60 Hz 4.5 kW (30A)
	200V 3LPE 50/60 Hz 6.8 kW (30A)
	220V 1LNPE 50 Hz 2.4 kW (16A)
	380V 3LNPE 50 Hz 6.3 kW (16A)
	200-220V 2LPE 60 Hz 4.5-5.3 kW (30A)
Dimensions	340 mm / 750 mm / 600 mm (W/H/D)
Weight (empty)	approx. 38 kg
A600 FM CM	220-220V 2LPE 60 Hz 4.5-5.3 kW (30A)
	230V 1LNPE 50/60 Hz 2.1-2.3 kW (10A)
	200V 2LPE 50/60 Hz 2.0 kW (15A)
SU05 CM	220-240 VAC, 1L N PE, 1950-2300 W, 50-60 Hz, 10 Á (EU)
	120 VAC, 1L PE, 1400 W, 60 Hz, 15 Á (USA)
Dimensions	340 mm / 613 mm / 560 mm (W/H/D)
	(FM CM incl. SU05 CM)
Weight (empty)	approx. 64 kg (FM CM incl. SU05 CM)
Colors	Black or anthracite

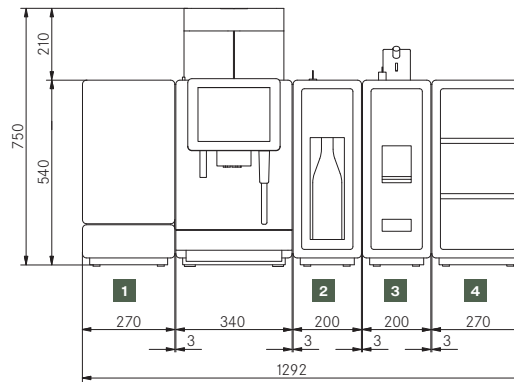

## Water connection

Mains water connection	Metal hose with union nut G3/8", L = 1500 mm
Water supply line	If possible on installation side: untreated water of drinking water quality (not from household decalcification system)
Water pressure	80-800 kPa (0.8-8.0 bar)
Flowrate	> 0.1l/sec
Water temperature	< 25°C
Total hardness	4-8 °dH GH (German total hardness) / 7-14 °H GH (French total hardness) / 70-140 ppm (mg/l)
Carbonate hardness	3-6 °dH KH (carbonate hardness) / 50-105 ppm (mg/l)
Acid content/pH value	6.5-7.5 pH
Chlorine content	< 0.5 mg/l
Internal Water Tank	Only available for A600 without MS/FM milk system or A600 MS EC with KE200, SU05 connection Built-in water tank: 4.0 liters, level monitoring with filter cartridge Claris Drip tray 3.0 liters, level monitoring




## Water drain

Drain hose	Dia. = 16 mm, L = 2000 mm
------------	---------------------------


## ADD-ON UNITS

<b>1 Cooling unit</b>	<b>SU05 EC (5I)</b>
Electrical connection	220-240V 1LNPE 50/60 Hz 0.72 A (10A)
	120V 1LNPE 60 Hz 1.5 A (10A)
	220V 1LNPE 50 Hz 0.72 A (10A)
	100V 1LNPE 50/60 Hz 1.65 A (10A)
Dimensions	270 mm / 540 mm / 475 mm (W/H/D)
Weight (empty)	approx. 20 kg
Compatible with	Model A600 MS EC / A600 FM EC
Colors	Black or anthracite

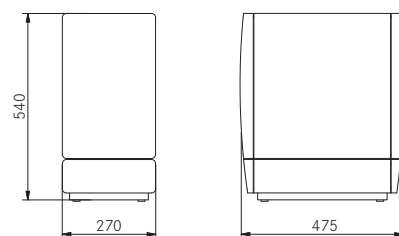


## Add-on units


<b>1 Cooling unit</b>	<b>SU05 CM (5I)</b>
Electrical connection	220-240V 1LNPE 50/60 Hz 1.95-2.3 kW (10A)
	120V 1LNPE 60 Hz 1.44 kW (15A)
	220 V 1LNPE 50 Hz 0.72 A (10A)
	100 V 1LNPE 50/60 Hz 1.35 kW (15A)
Dimensions	270 mm / 540 mm / 475 mm (W/H/D)
Weight (empty)	approx. 24 kg
Compatible with	Model A600 FM CM
Colors	Black or anthracite

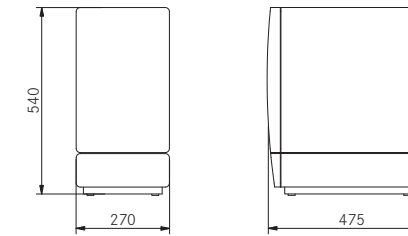


<b>Cooling unit</b>	<b>SU12 EC (12 I)</b>
Electrical connection	220-240 V 1LNPE 50/60 Hz 0.72 A (10 A)
	110-127 V 1LNPE 60 Hz 1.5-1.7 A (10 A)
	220 V 1LNPE 50 Hz 0.72 A (10 A)
	100 V 1LNPE 50/60 Hz 1.7 A (10 A)
Dimensions	340 mm / 540 mm / 475 mm (W / H / D)
Weight (empty)	approx. 26 kg
Compatible with	Model A600 MS EC / A600 FM EC
Colors	Black or anthracite

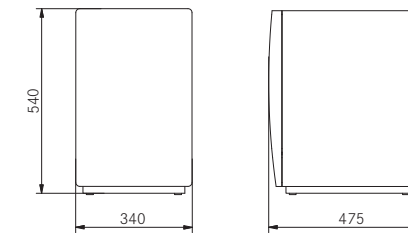

<b>Cooling unit</b>	<b>KE200 EC (4 I)</b>
Electrical connection	220-240 VAC, 1L N PE, 82 W, 10 Á, 50-60 Hz
	110 VAC, 1L N PE, 1.5 Á, 60 Hz
	100 VAC, 1L N PE, 1.5 Á, 50-60 Hz
Dimensions	225 mm / 507 mm / 453 mm (W/H/D)
Weight (empty)	approx. 13 kg
Compatible with	Model A600 MS EC / A600 FM EC
Color	Stainless steel

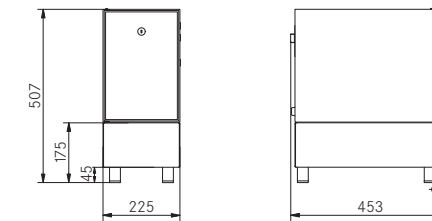


<b>Cooling unit</b>	<b>UC09 EC (9 I)</b> (Only with fix water connection available)
Electrical connection	220-240V 1LNPE 50/60 Hz (10A)
Dimensions	330 mm / 240 mm / 550 mm (W/H/D)
Weight (empty)	approx. 27 kg
Compatible with	Model A600 MS EC (without built in water tank) / A600 FM EC
Color	Black

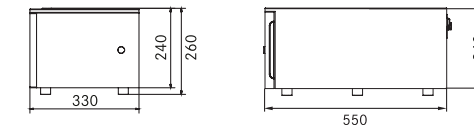


## Add-on units


<b>2 Flavor Station</b>	<b>FS30</b>
Electrical connection	100-240V 1LNPE 50/60 Hz 75W (10A)
Dimensions	200 mm / 540 mm / 453 mm (W/H/D)
Weight (empty)	approx. 18 kg
Compatible with	Model A600 FM CM / A600 FM EC
Colors	Black or anthracite

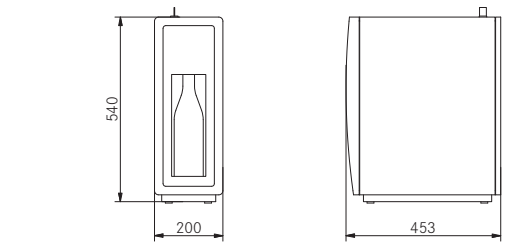


<b>Flavor Station</b>	<b>FSU30</b>
Electrical connection	220-240 V, 1L N PE, 50 W, 50-60 Hz
Dimensions	235mm / 415 mm / 350mm (W/H/D)
Weight (empty)	approx. 15 kg
Compatible with	Model A600 FM CM, A600 FM EC
Colors	Stainless steel

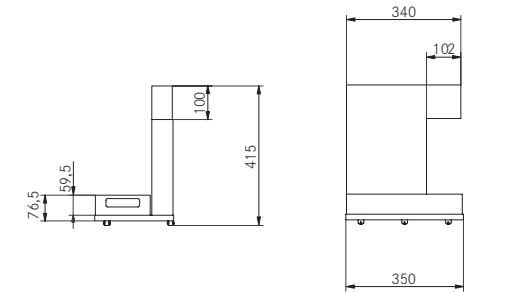

<b>3 Accounting system</b>	<b>AC200</b>
Accounting systems	Coin validator, Coin changer, Cashless system
Electrical connection	85-264 V 1LNPE 50/60 Hz (10 A)
Dimensions	200 mm / 630 mm / 453 mm (W / H / D)
Weight (empty)	approx. 18 kg
Compatible with	Model A600 / A600 MS EC / A600 FM EC / A600 FM CM
Colors	Black or anthracite

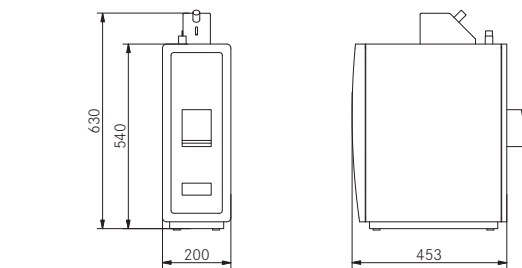

<b>Accounting system</b>	<b>AC125 CL</b>
Electrical connection	85-264V 1LNPE 50/60 Hz (10A)
Dimensions	125 mm / 150 mm / 310 mm (W / H / D)
Weight (empty)	approx. 2 kg
Compatible with	Model A600 / A600 MS EC / A600 FM EC / A600 FM CM
Colors	Black



<b>4 Cup warmer</b>	<b>CW</b>
Electrical connection	220-240 VAC, 1L N PE, 110-130W, 50-60 Hz
	110-127 VAC, 1L N PE, 80-130W, 50-60 Hz
	100 VAC, 1L N PE, 80W, 50-60 Hz
	220 VAC, 1L N PE, 110W, 50-60 Hz
Dimensions	270 mm / 540 mm / 454 mm (W / H / D)
Weight (empty)	approx. 20 kg
Compatible with	Model A600 / A600 MS EC / A600 FM EC / A600 FM CM
Colors	Black or anthracite

